

LINERS PROTECTION FELT

COVER' LINER

Classic / Strong



PROTECTION
AGAINST DAMAGE



SOFT
TOUCH




EASY
TO CUT



ECO-CONCEPTION:
LOW ENERGY
PROCESS



100% RECYCLABLE
FELT

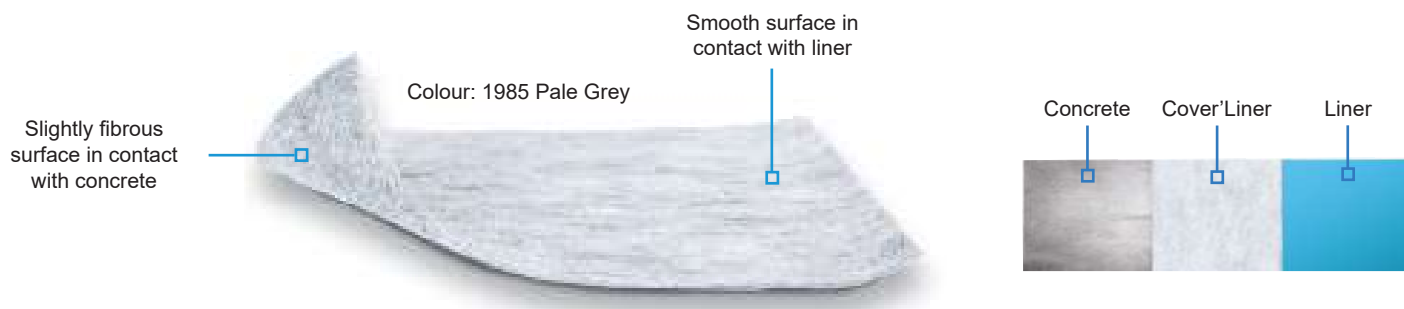

EFFICIENT PROTECTIVE BARRIER (walls and bottom) between the foundations and the Liner:

- SOFTENS IMPACTS
- PROTECTS AGAINST PERFORATION: the fibres thickness and density protect from any sharp element
- HIDES ANY IMPERFECTIONS of CONCRETE WALLS

EASY INSTALLATION: easy to cut / Bright flecked grey avoiding light reflection

ENVIRONMENTALLY FRIENDLY: made with fusionbonding fibres (required low energy, no water) / Contains no chemicals or latex

INERT MATERIAL / ROT-PROOF



TECHNICAL DATA

Surface: homogeneous needlepunched felt

Fibres: 100 % polyolefin

Backing: fusionbonding fibres

Total weight Classic version: 350 g/m² ± 10%

Total weight Strong version: 450 g/m² ± 10%

Average thickness: 2,70 mm ± 10%

Tensile strength*: 9 000 N/m longitudinal direction
16 500 N/m transversal sense

Elongation*: 86% longitudinal direction
83% transversal sense



INSTALLATION

Clean the concrete to remove all the dust

Smooth surface: towards liner

Slightly fibrous surface: concrete or wood side

Fix it with double-sided tape or a waterproof spray glue

REFERENCES

Dimensions	Classic version codes	Strong version codes
1,50 x 30 m	POPTF1985G150	PSMTF1985G150
2 x 30 m	POPTF1985C2	PSMTF1985C2

Sold in europalette of 8 rolls stored vertically



A Sommer Needlepunch brand

Sommer Needlepunch
341, rue de la Mairie
59780 Baisieux - France
www.sommernp.com

Tel : +33 (0)3 20 64 46 46
Fax : +33 (0)3 20 64 46 24
E-mail : info@sommernp.com

Linerclassicstrong 2024-A1-0524 / Photo credit : Sommer.
We reserve the right to alter technical specifications without prior notice.

